

IR-BAT SERIES

HIGH-SPEED COMPACT RADIATION THERMOMETER



The IR-BA Series is a compact, fast response time, non-contact Infrared Thermometer. In spite of its compact design (about the size of a deck of cards) the IR-BA internally handles all the signal processing necessary to provide a 4 to 20mA DC linear output over its measuring range. The compact size allows this on-line unit to be installed in tight spaces and on small production equipment. This full-featured product line provides 50ms response times and spot sizes as small as 5mm. The IR-BA's infrared spectral selectivity allows it to be used on application specific process such as; glass, semiconductor processing and measurement of thin plastics (down to 25mm thick) such as PE & PET.



■ FEATURES

- Fast response time of 50ms
- Compact and light-weight
- 4 to 20mA DC linear output
- Accurate emissivity setup
- Abundant mountings & accessories

■ MODELS

• General Purpose Models

IR- BAT□□□

Spot size & distance

- 1: Standard Φ 40/500mm
- 2: Small spot/short distance Φ 5/80mm
- S: Small spot/long distance Φ 40/1000mm

Measuring range & response time

- A: 0 to 300°C, 100ms
 - B: 0 to 600°C, 100ms*
 - M: 0 to 300°C, 50ms
 - P: 0 to 600°C, 50ms*
- *Only available for standard and small spot/long distance models

Cable

- Blank: Standard 2m
- E: Extension cable connectable model

• Application Specific Models

IR- BAX□□□

Application

- G1: Glass Temperature
- L1: Lamp Anneal
- F1: Polyethylene Film
- F2: Polyester Film
- H1: Combustion Gas

Cable

- Blank: Standard 2m (5m for IR-BAXH1)
- E: Extension cable connectable model


• Extension cable

IR- ZBRA□□□

Cable length (m)

□□□: Max 200m

■ CONNECTIVITY

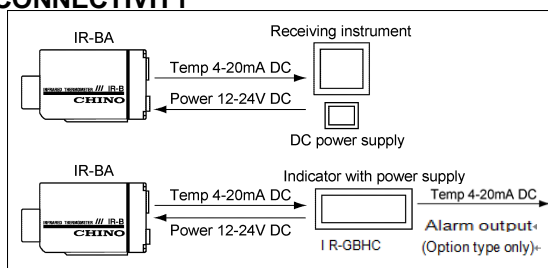

■ SPECIFICATIONS FOR GENERAL PURPOSE MODELS

Measuring system:	Broadband radiation thermometer
Measuring wavelength:	8 to 14 μ m
Element:	Thermopile
Resolution:	0.2°C (at 0 to 300°C) 0.5°C (at 0 to 600°C)
Repeatability:	\pm 0.2°C (at 0 to 300°C) \pm 0.3°C (at 0 to 600°C)
Optics:	GE lens
Emissivity compensation:	ϵ =1.99 to 0.10 (digital switch)
Analog output:	4 to 20mA DC (load resistance 280 Ω or less)
Working temperature:	0 to 50°C
Power supply:	12 to 24V DC
Current consumption:	60mA or less
Cable length:	Φ 4.5 4-core shielded cable Non-CE approval --- Max 200m with extension cable CE approval --- Standard 2m Max length 30m on order (indoor use only) IR-ZBRA is not applicable.
Casing:	Aluminum die-cast
Protection:	IPX2
Mounting:	M4 screws (2 pcs) or tripod
Weight:	Approx 220g
CE approval:	EMC directive EN61326+A1 Class A, EN61326+A1 Annex A1 Notes) 1. Connecting cable up to 30m (IR-ZBRA is not applicable.) 2. One-by-one DC power supply unit must be used.
Stability:	\pm 10°C under EMC test environment

■ SPECIFICATIONS FOR APPLICATION SPECIFIC MODELS (Non-CE approval)

Measuring system:	Narrow band radiation thermometer
Measuring wavelength:	4.6 to 5.2 μ m (IR-BXG1) 3.43 μ m (IR-BAXL1, IR-BAXF1) 7.6 to 8.4 μ m (IR-BAXF2) 4.3 μ m (IR-BAXH1)
Element:	Thermopile
Resolution:	0.5°C (0.2°C for IR-BAXG1)
Repeatability:	0.6°C (0.3°C for IR-BAXG1)
Optics:	GE lens (Ge/Si lens for IR-BAXH1)
Cable:	Φ 4.5 4-core shielded cable Standard length 2m, 5m for IR-BAXH1 Max 200m with extension cable

*Other specifications are same as General Purpose Models.

SPECIFICATIONS


		Models	Measuring range	Response time (95% response)	Spot size/measuring distance	Accuracy rating	Measuring wavelength
General models	Standard	IR-BAT1A	0 to 300°C	100ms	Φ40/500mm	300°C or less: ±3°C 300°C or more: ±1% of measured value (at ε=1 under reference operation conditions)	8 to 14μm
		IR-BAT1B	0 to 600°C				
	Small spot & short distance	IR-BAT2A	0 to 300°C	100ms	Φ5/80mm		
	Small spot & long distance	IR-BATSA	0 to 300°C	100ms	Φ40/1000mm		
		IR-BATSB	0 to 600°C				
High-speed models	Standard	IR-BAT1M	0 to 300°C	50ms	Φ40/500mm		
		IR-BAT1P	0 to 600°C				
	Small spot & short distance	IR-BAT2M	0 to 300°C	50ms	Φ5/80mm		
	Small spot & long distance	IR-BATSM	0 to 300°C	50ms	Φ40/1000mm		
		IR-BATSP	0 to 600°C				
Glass Temperature		IR-BAXG1	100 to 400°C	1s	Φ20/150mm	±4°C	4.6 to 5.2μm
Lamp Anneal		IR-BAXL1	400 to 1300°C	1s	Φ40/500mm	1% of measured value	3.43μm (half-value width 120mm)
Polyethylene Film		IR-BAXF1	80 to 250°C	1s (63% response)	Φ40/500mm	±4°C	
Polyester Film		IR-BAXF2	50 to 150°C	1s	Φ40/500mm	±4°C	7.6 to 8.4μm
Combustion Gas		IR-BAXH1	500 to 1300°C	10s	Φ100/1000mm	1.5% of measured value	4.3μm

Note) Normal operation condition: Temperature --- 23°C±5°C, Humidity --- 35-75%RH

RELATION BETWEEN MEASURING DIAMETER AND DISTANCE

Models	Measuring diameter and distance (Unit: mm)
IR-BAT1 IR-BAT1M IR-BAXL1 IR-BAXF1 IR-BAXF2	
IR-BAT2 IR-BAT2M	
IR-BATS IR-BATSM	
IR-BAXG1	
IR-BAXH1	

WIRING

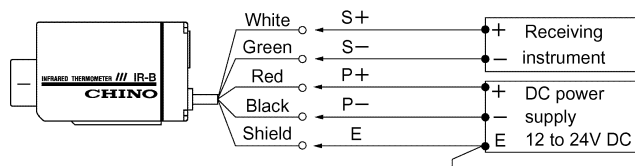

INDICATOR WITH POWER SUPPLY

IR-GBHC□



MODELS


IR-GBHC□

Alarm output
 K: With Alarm
 N: None

SPECIFICATIONS

- Input signal: 4 to 20mA DC
- Display: Red and Green 7 segments LED
Character height 18mm
- Analog output: 4 to 20mA DC isolated output
Load resistance 550Ω or less
- Alarm output: Photo coupler open collector output (NPN) 3 points,
30VDC, 50mA or less (option)
- Power supply to IR-BA:
12V DC 100mA
- Working temperature: -5 to 50°C
- Working humidity:
35 to 85%RH (no dew condensation)
- Power supply: 100 to 240V AC ±10%, 50/60Hz
- Power consumption:
Max. 12VA at 100V AC
Max. 15VA at 240V AC
- Weight: Approx. 250g


EXTERNAL DIMENSIONS

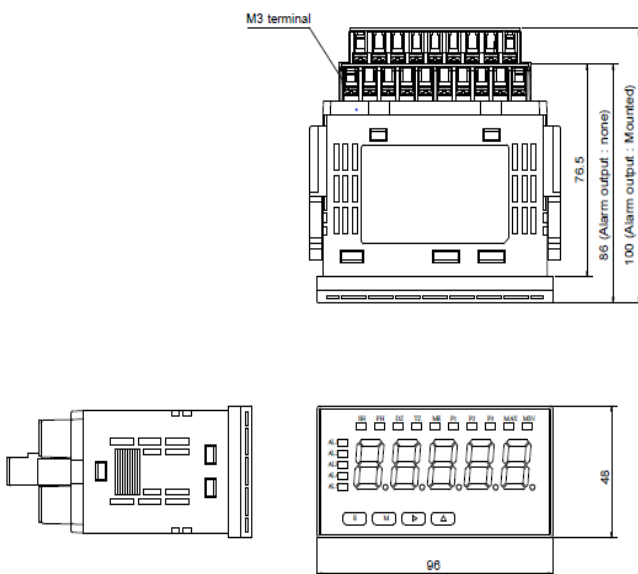

Unit: mm


TERMINAL DIAGRAMS

•Lower terminal connections (input / power supply)




Terminal	Name	Description
1	S+	Input + terminal current range
2	S-	Input - terminal current range
3, 4	NC	No connection (Intermediate terminal cannot be used)
5	P+	Built in excitation output + terminal(sensor power supply)
6	P-	Built in excitation output - terminal(sensor power supply)
7	NC	No connection (Intermediate terminal cannot be used)
8	E	Ground
9,10	AC POWER	AC Power supply terminal

•Upper terminal connections (external control / analog output)

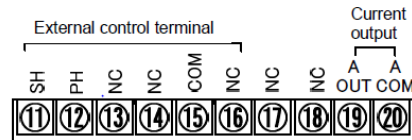

Terminal	Name	Description
11	SH	External control terminal : Sample hold
12	PH	External control terminal : Peak hold
13, 14	NC	No connection (Intermediate terminal cannot be used)
15	COM	External control common terminal
16, 17, 18	NC	No connection (Intermediate terminal cannot be used)
19	A OUT	Analog current output + terminal
20	A COM	Analog current output - terminal *1

•Middle terminal connections (alarm output, option model IR-GBHCK)

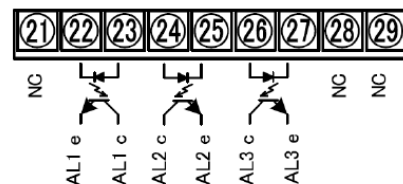


Terminal	Name	Description	Photo coupler output
21	NC	No connection (Intermediate terminal cannot be used)	-
22	AL1 e	AL1 Output common terminal	Emitter
23	AL1 c	AL1 Output terminal	Collector
24	AL2 c	AL2 Output terminal	Collector
25	AL2 e	AL2 Output common terminal	Emitter
26	AL3 c	AL3 Output terminal	Collector
27	AL3 e	AL3 Output common terminal	Emitter
28,29	NC	No connection (Intermediate terminal cannot be used)	-


■ EXTERNAL DIMENSIONS

● Radiation Thermometer

•IR-BAT□□

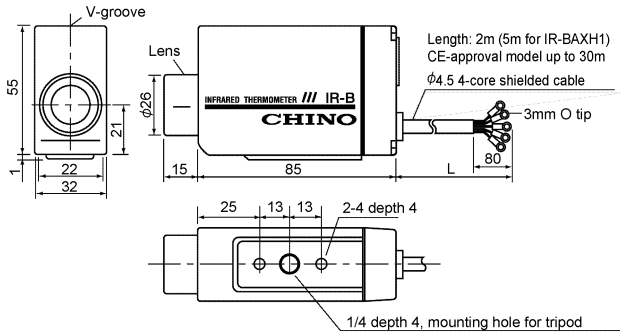


•IR-BAT□□E

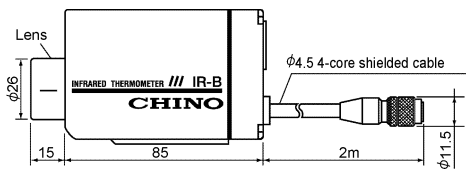


● Extension cable

•IR-ZBRA□□□




● Mounting metal

•IR-ZBML




● Protective case


•General type IR-ZBCSH

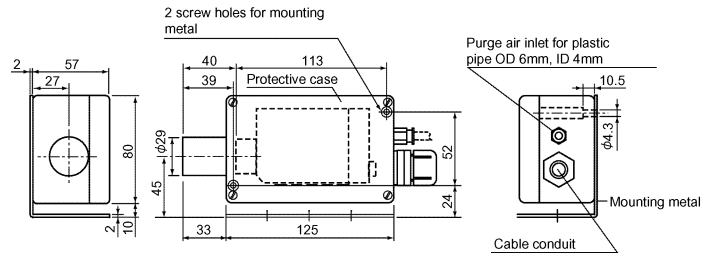

•Water cooling protective case IR-ZBCWH

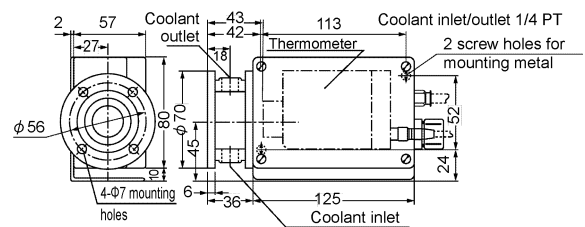

•Sanitary case IR-ZBCAH

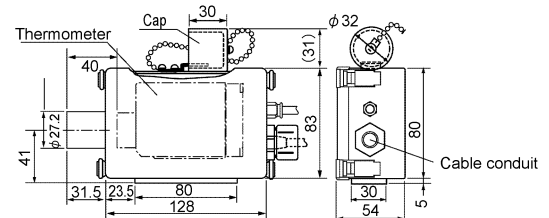

Unit: mm

Specifications subject to change without notice. Printed in Japan (I) 2016. 11 Recycled Paper

CHINO CORPORATION

32-8, KUMANO-CHO, ITABASHI-KU, TOKYO 173-8632

PHONE: +81-3-3956-2171

FAX: +81-3-3956-0915

E-mail: inter@chino.co.jp

Website: <http://www.chino.co.jp>